Parts and Hardware Identification

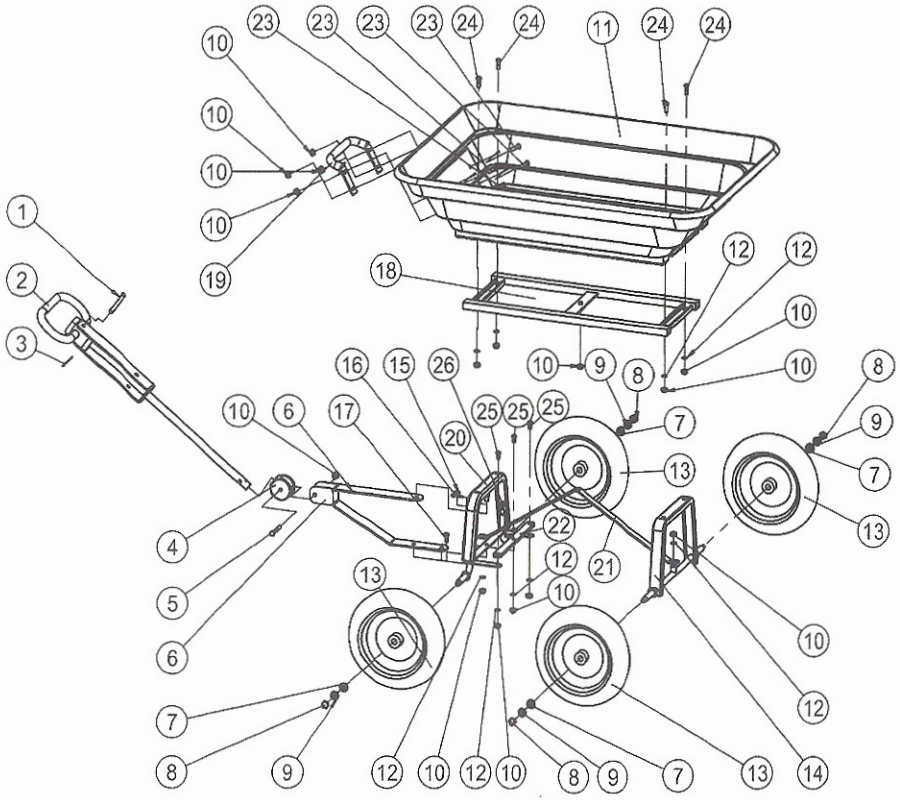

Part No.	Part Description	Q'ty
1	Flat head big pin on handle	1
2	Handle	1
3	B type Pin	1
4	Plastic ball	1
5	M8*60 bolt	1
6	Yoke	1
7	M12 washer	4
8	Cap Nut	4
9	M12 Spring Washer	4

Part No.	Part Description	Q'ty
10	M8 Lock Nut	19
11	Tray	1
12	M8 Washer	19
13	Wheel	4
14	Rear Axle Frame	1
15	M10 Washer	1
16	M3*30 Pin	1
17	M8*20 Hex head Bolt	1
18	Frame	1

Part No.	Part Description	Q'ty
19	Handle on Tray	1
20	Front Axle frame	1
21	Long Brace	1
22	Short Brace	1
23	M8*25Bolt	4
24	M8*40 flat head bolt	4
25	M8*15 hex head Bolt	3
26	M12 Lock Nut	2

Q051

GARDEN CART

Owner's Manual

Save this manual for future reference

CAUTION:

Read, understand and follow ALL instruction ; before using this garden cart.

Important Safety Instructions

Assembly Instructions

Parts and Hardware Identification

Q051

Assembly Instructions

Step 1.
Turn the Tray (11)upside down.

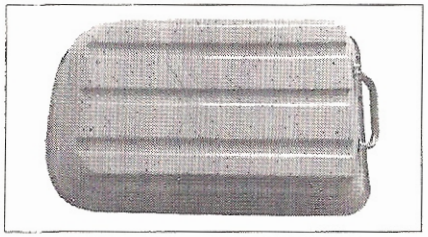

Step 2.
Put Frame(18) and Rear Axle Frame(14) on the Tray(11).

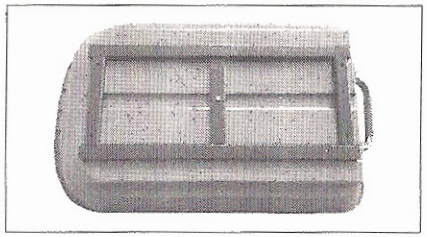

Step 3.
Then use M8*40 flat Head Bolt(24),Nut(10) and Washer(12) to assemble them on the Tray(11),tightern.

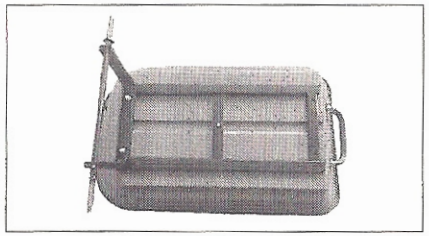

Step 4.
Use M8*40 flat Head Bolt(24),Nut(10) and Washer(12) to assemble Front Axle Frame(20) on the Tray(11),tighten.

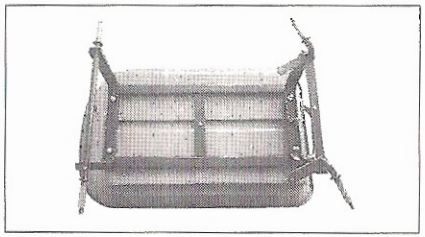

Step 5.
Assemble the Short Brace(22) on the Front Axle Brace(20) with M8*15 Bolt(25),Nut (10) and Washer(12),tighten.

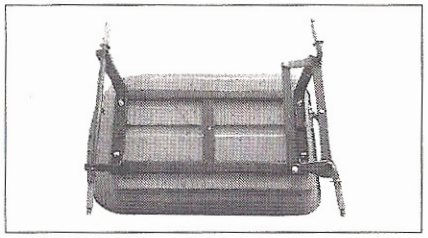

Step 6.
Assemble the long side of the Yoke(6) on the Short Brace (22) with M8*15 Bolt(25) ,Nut(10) and Washer(12). For the Short side of the **Yoke(6),please use** Pin M3*30(16) and M10 **Washer(15) fixed.**

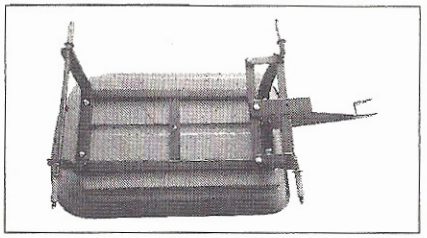

Assembly Instructions

Step 7.
Use M8 Lock Nut(10) to middle of Long Brace(21) on the middle of Bottom Frame(18) ,then use M8 Lock Nut(10) to fix one side of the Long Brace(21) on the Rear Axle Brace(14),then use M8*20 Bolt(17) ,Nut (10) and Washer(12) to fix another side of Long Brace(21),Front Axle Brace (2)and Yoke(6) together,tighten.

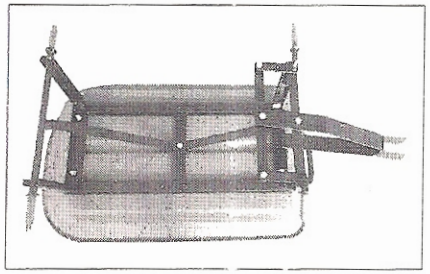

Step 8.
Assemble 4 wheels (13)with Cap Nut(8) ,M12 Spring Washer (9) and M12 Washer(7), tighten。

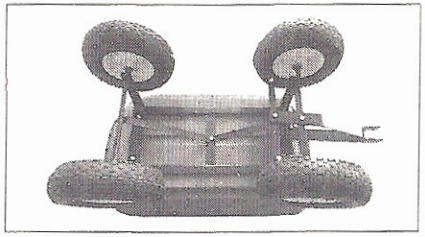

Step 9.
Put the Handle(2),Plastic Ball(4) and Yoke(6) together with M8*60 Bolt(5),Nut(10) and Washer(12),then tighten.

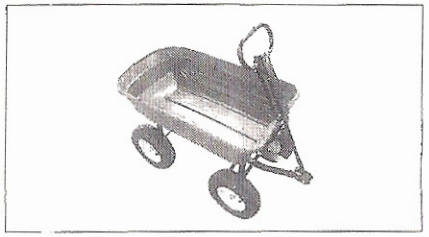

IMPORTANT SAFETY INSTRUCTION

LOADING CAPACITY: 1000LBS
DO NOT inflate tries more than 30 psi.
DO NOT operate if any part is damaged or broken.
Distribute load evenly in cart bed.
DO NOT use on steep inclines where tipping may occur.
NOT FOR USE BY CHILDREN.